


CS6P

200/210/220/230/240

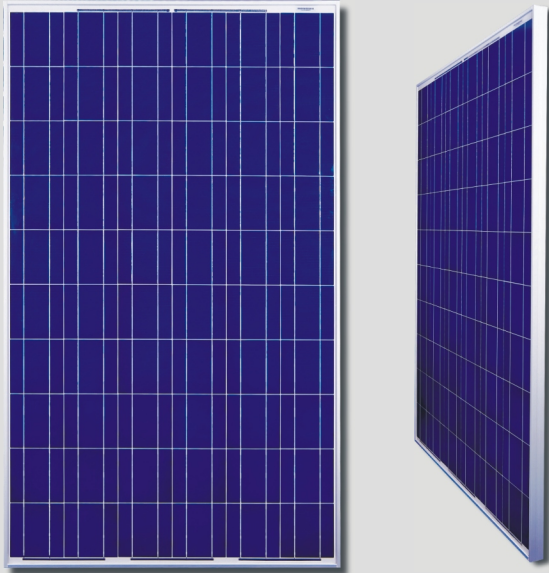

Key Features

- 6 years product warranty (materials and workmanship); 25 years module power output warranty
- Industry leading power tolerance : $\pm 5W$ ($\pm 2.1\%$)
- Strong framed module, passing mechanical load test of 5400Pa to withstand heavier snow load
- The 1st manufacturer in PV industry certified for ISO:TS16949 (The automotive quality management system) in module production since 2003
- ISO17025 qualified manufacturer owned testing lab, fully complying to IEC, TUV, UL testing standards

On-grid Module

CS6P is a robust solar module with 60 solar cells. These modules can be used for on-grid solar applications. Our meticulous design and production techniques ensure a high-yield, long-term performance for every module produced. Our rigorous quality control and in-house testing facilities guarantee Canadian Solar's modules meet the highest quality standards possible.

Applications

- On-grid residential roof-tops
- On-grid commercial/industrial roof-tops
- Solar power stations
- Other on-grid applications

Quality Certificates

- IEC 61215, IEC 61730, TUV Safety Class II, UL 1703, CE
- ISO9001:2000: Standards for quality management systems
- ISO/TS16949:2002: The automotive quality management system
- QC080000 HSPM: The Certification for Hazardous Substances Regulations



CS6P-200/210/220/230/240

Electrical Data


	CS6P-200P CS6P-200M	CS6P-210P CS6P-210M	CS6P-220P CS6P-220M	CS6P-230P CS6P-230M	CS6P-240P CS6P-240M
Nominal Maximum Power at STC (Pmax)	200W	210W	220W	230W	240W
Optimum Operating Voltage (Vmp)	28.9V	28.9V	29.3V	29.8V	30.4V
Optimum Operating Current (Imp)	6.93A	7.26A	7.52A	7.71A	7.91A
Open Circuit Voltage (Voc)	36.2V	36.4V	36.6V	36.8V	37.0V
Short Circuit Current (Isc)	7.68A	7.91A	8.09A	8.34A	8.61A
Operating Temperature	-40°C~+85°C				
Maximum System Voltage	1,000V (IEC) /600V (UL)				
Maximum Series Fuse Rating	15A				
Power Tolerance	± 5W				
Temperature Coefficient	Pmax	-0.45%/°C			
	Voc	-0.35%/°C			
	Isc	0.060%/°C			
	NOCT	45°C			

Under Standard Test Conditions (STC) of irradiance of 1000W/m², spectrum AM 1.5 and cell temperature of 25°C

Mechanical Data


Cell Type	Poly-crystalline / Mono-crystalline
Cell Arrangement	60 (6 x 10)
Dimensions	1638 x 982 x 40mm (64.5 x 38.7 x 1.57in)
Weight	20kg (44.1 lbs)
Front Cover	Tempered glass
Frame Material	Anodized aluminium alloy
Standard Packaging (Modules per Pallet)	20pcs

Engineering Drawings

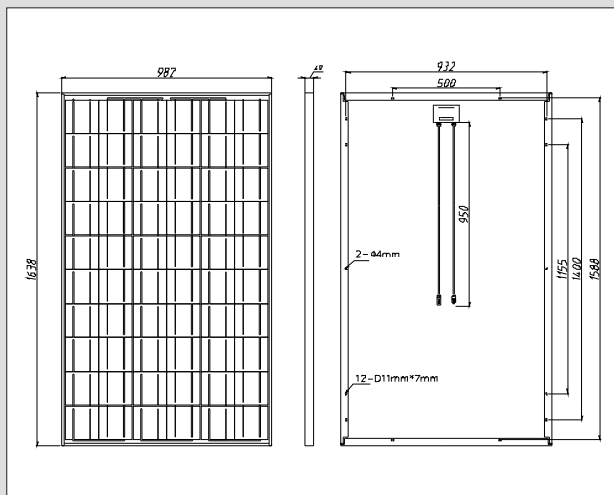

*Specifications included in this datasheet are subject to change without prior notice.

I-V Curves (CS6P-230P)

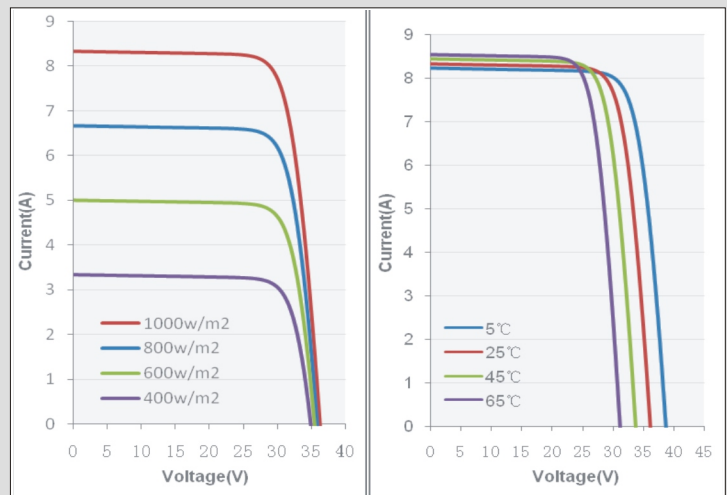

About Canadian Solar

Canadian Solar is a vertically-integrated manufacturer of ingots, wafers, cells, solar modules and custom-designed solar power applications. Canadian Solar was founded in Canada in 2001 and was successfully listed on NASDAQ Exchange (symbol: CSIQ) in November 2006.

By the end of 2008, Canadian Solar has a module capacity of over 600MW. With revenue of 709.2 million dollars in 2008, a 134% growth in revenue over 2007, Canadian Solar has become one of the fastest-growing companies in the solar industry.

Headquarters | 650 Riverbend Drive, Suite B
 Kitchener, Ontario | Canada N2K3S2
 Tel: +1-519-954-2057
 Fax: +1-519-954-2597
 inquire.ca@canadian-solar.com
 www.canadian-solar.com